

SPHERE

1600



Optionally with climbing holds and PVC tube or stainless steel tube with diameter Ø500mm.

PRODUCT COMPOSITION

vandal-resistant fiberglass shell,
EPDM rubber granules,
aliphatic PU binder,
opt. climbing holds,
opt. stainless steel (opt. PVC) tube

COLOR COMBINATION

Various colors available on request

COLOR STABILITY

UV stable

RECOMMENDED SAFETY SURFACE

safety rubber surface in the area of 1500mm around the product (according to EN1177)

PRODUCT SAFETY

certified according to EN1176
complies with ASTM F1487 and CAN/CSA Z614

INSTALLATION


the product is installed onto a concrete foundation

PACKAGING

wrapped in plastic and delivered on a pallet 2100 x 2100 mm

STORAGE

in original packaging on a pallet
in temperatures between - 40° C and 50° C

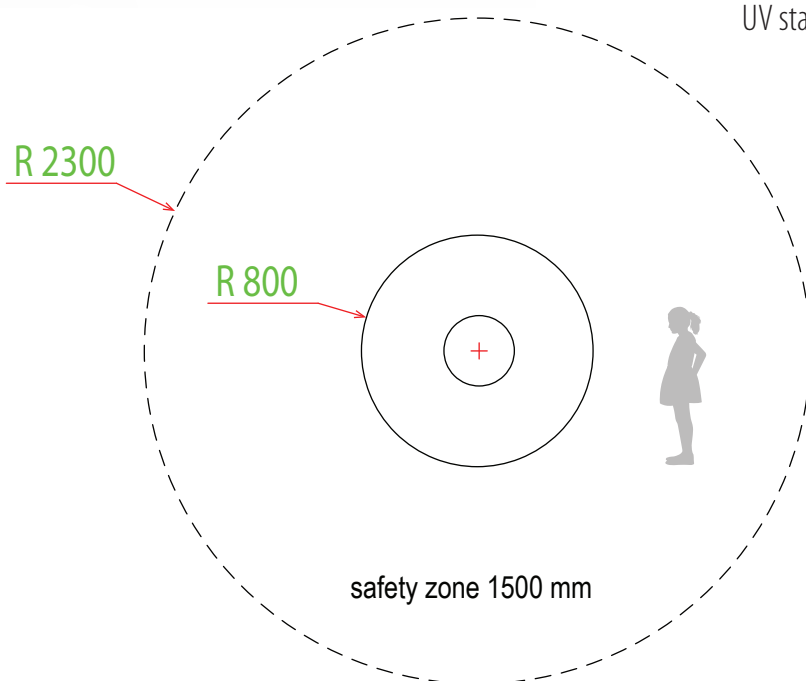

Our products are handmade, please allow dimensional tolerance up to 20 mm

280 kg 285 kg 340 kg weight	1600mm critical fall height	1 hr assembly time	2 - 12 yrs users' age	6 max. number of users	diameter: Ø 1600 mm dimensions
---	---------------------------------------	------------------------------	---------------------------------	----------------------------------	--

3D PROGRAM, s.r.o.

Objízdná 1911
Otrokovice 765 02
Czech Republic

www.3dprogram.eu
info@3dprogram.eu
+420 602 500 045 +420 577 700 718

